

Spanners Switch Disconnect

Innovation in Reliability.

The **Spanners Disconnect** was developed and manufactured in accordance to IEC60947-3 in 2008 and boasts numerous practical benefits.

Its efficient yet intuitive design is coupled with the product's durability, and requires minimal maintenance.

Having undergone rigorous testing at DEKRA (KEMA-Holland), the superior quality of the **Spanners Disconnect** is assured.

Safety and ease of operation are some of the hallmarks of an exceptional product – and the **Spanners Disconnect** achieves just that.



ILU/2500/3P/B/v1



Spanners International Pte Ltd Since 1969

(Registration No. 198401242K)


No 6, Changi North Street 1 Spanners Building Singapore 498825

Tel: (65) 6543 2388 Main Fax: (65) 6543 2688 Sales Fax: (65) 6545 0010

Email: sales@spanners.com.sg Website: www.spanners.com.sg



FRONT VIEW

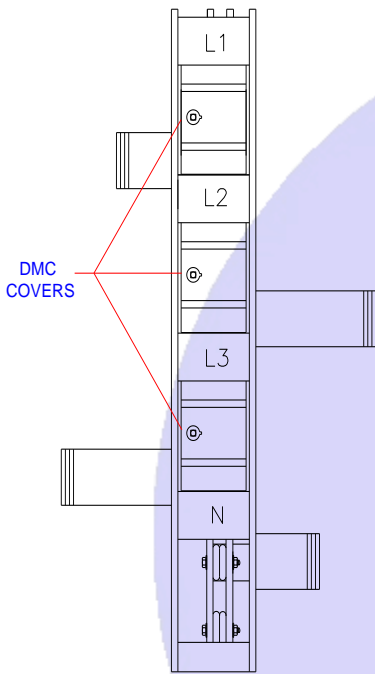

Providing Durability

Housing is constructed with Sheet Moulded Compound, which is robust and has high insulating properties

Ingress protection of the housing is configured to satisfy IP2X


Designing with Efficiency

Front-access design brings about easy installation

Achieving Your Needs

Configurations and arrangements tailored to meet your requirements

LEFT SIDE VIEW

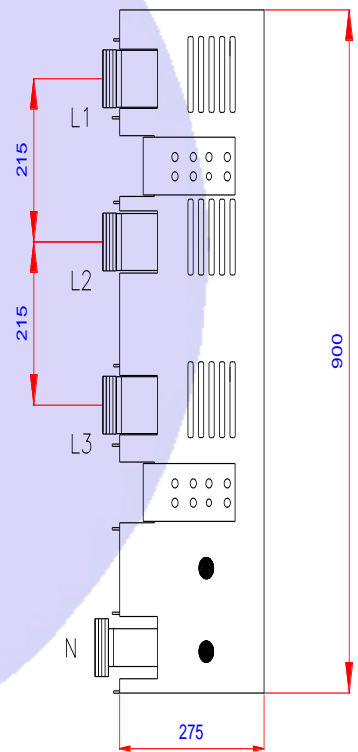

Ensuring Safety

Specially-insulated Operating Handle

Handle is fully interlocked with disconnector. Removal of handle is possible only when disconnector is fully closed/opened

Pad-lockable design to provide added protection for operators

Enables disconnector to be pad-locked exclusively in safe and open position

| Switch Type | ILU/2500/3P/B/v1 | ILU/3200/3P/B/v1 |
|--------------------------------|-------------------|-------------------|
| Rated Operational Current (Ie) | 2500A | 3200A |
| Rated Operational Voltage (Ue) | 415V | 415V |
| Rated Insulation Voltage (Ui) | 690V | 690V |
| Utilization Category | AC-20B | AC-20B |
| Rated Short-Circuit Current | 50KA per 1 second | 50KA per 1 second |
| Estimated Weight | 70Kg | 85Kg |